

## x900-12X and 24X Series



### Advanced Gigabit Layer 3+ Expandable Switches

The x900 Layer 3+ switches have high-speed 60Gbps expansion bays which provide a high level of port flexibility and application versatility unmatched by any other 1RU Gigabit Ethernet switch on the market.

The x900 Layer 3+ switches use **VCStack™** to deliver chassis-like resiliency and redundancy features without the high price tag. VCStack allows two devices to be connected in a Virtual Chassis (VC) Stack. This provides total device redundancy - if either device in the stack fails, the traffic is seamlessly routed to the other, ensuring there is minimal network disruption. Using VCStack also allows stacked devices to appear as a single node on the network, greatly simplifying your management.

The x900 Layer 3+ switches utilize a sophisticated, **highly modular design**, allowing them to grow in response to your network demands. There is a comprehensive range of copper and fiber expansion modules (XEMs) available, from 10/100/1000Mbps to 10 Gigabit Ethernet (10GbE). These XEMs are fully hot-swappable, which means maintenance and network re-configuration do not affect your network uptime. Dual redundant Power Supply Units (PSUs) are also hot-swappable, adding to the impressive list of high-availability features.

The x900 Layer 3+ switches run the advanced **AlliedWare Plus™ Layer 3 Fully Featured Operating System** delivering a rich feature set and an industry-standard CLI. AlliedWare Plus™ is Allied Telesis' next generation operating system, providing you with advanced IPv4 and IPv6 features combined with even greater robustness and ease of management.



#### Key Features

**Resilient** - VCStack provides fast failover for uninterrupted network service. Sophisticated high availability features ensure traffic flow continues even during outages.

**Scalable** - Add more XEMs as your network grows. Create a VCStack to increase port density and resiliency without increasing management complexity.

**Reliable** - Hot-swappable XEMs, redundant hot-swappable PSUs ensure no network interruptions during maintenance or reconfiguration.

**High-performing** - Non-blocking architecture and superior QoS ensure wire-speed delivery of all your critical IPv4 and IPv6 traffic.

**Easy to manage** - The industry standard CLI reduces training requirements, and each VCStack appears as one virtual chassis with a single IP address to simplify management.

**Secure** - Advanced security features protect your network - from the edge to the core. Network Access Control (NAC) gives unprecedented control over user access to your network.

# x900-12X AND 24X SERIES | Advanced Gigabit Layer 3+ Expandable Switches

## Resilient

**VCStack provides fast failover for uninterrupted network service. High availability features ensure traffic flow continues even during outages.**

### VCStack

Create a VCStack with two units using the XEM-STK. Each XEM can provide 60Gbps of stacking bandwidth. VCStack provides a highly available system where network resources are spread out across stacked units, reducing the impact if one of the stacked units fails. Aggregate switch ports on different units across the stack to provide excellent high availability.

### Control Plane Prioritization (CPP)

Ensure maximal performance and prevent network outages with CPP. CPP prevents the Control Plane from becoming flooded in the event of a network storm or Denial of Service (DoS) attack.

## Scalable

**Add more XEMs as your network grows. Add more devices to a VCStack to increase port density and resiliency without increasing management complexity.**

Our high speed XEMs provide both copper and fiber connectivity, delivering the ultimate in flexibility. XEM options are:

- AT-XEM-1XP - 1 x 10GbE (XFP)
- AT-XEM-12S - 12 x 100/1000BASE-X SFP ports
- AT-XEM-12T - 12 x 10/100/1000BASE-T (RJ-45) ports
- AT-XEM-STK - Stacking

XEMs are also compatible with the SwitchBlade x908 Advanced Layer 3 Modular Switch. All XEMs provide non-blocking performance. XEMs are ideal for aggregating gigabit to the desktop or for gigabit uplinks from Fast Ethernet switches.

## Reliable

**Hot-swappable XEMs, redundant hot-swappable PSUs and replaceable fans ensure no network interruptions during maintenance or reconfiguration.**

10GbE expansion modules and hotswappable XFPs provide high-speed, high-capacity fiber uplinks, with the option of either 10Gbps or 20Gbps uplink capacity to the network core.

The x900 Layer 3+ switches operate with one PSU - installing a second PSU provides redundancy. Internal PSUs eliminate the need for an external Redundant Power Supply (RPS) that occupies valuable rack space. Built-in redundancy guarantees the continued delivery of essential services.

The x900 switches also feature front-to-back cooling, maximising their reliability.

## High-performing

**Non-blocking architecture and superior QoS ensure wire-speed delivery of all your critical IPv4 and IPv6 traffic.**

### Ethernet Protected Switched Rings (EPSR)

EPSR and 10 GbE modules allow several x900-24X switches to form a protected ring with 50ms failover. This feature is perfect for high performance at the core of enterprise or provider access networks.

### Wire speed switching

The x900 Layer 3+ switches have fully non-blocking switching on all ports, so IPv4 Layer 2 switching and Layer 3 routing occur at wire speed. This is ideal for high-end server deployments, and when aggregating gigabit connections.

### Aggregation at Layer 2 and Layer 3

A large L3 route table provides support for thousands of IP interfaces, essential when aggregating complex IP networks.

### Industry-leading Quality of Service (QoS)

Comprehensive low-latency wire-speed QoS provides flow-based traffic management with full classification, prioritization, traffic shaping and min/max bandwidth profiles. Enjoy boosted network performance and guaranteed delivery of business-critical Ethernet services and applications. Time-critical services like voice and video applications take precedence over non-essential services like file downloads, maintaining responsiveness of Enterprise applications. Unmatched QoS accuracy is achieved with a bandwidth limit resolution down to 1Kbps, which is ideal for precise control of Enterprise desktop-based VoIP applications.

## Easy to manage

**The industry standard CLI reduces training requirements, and each VCStack appears as one virtual chassis with a single IP address to simplify management.**

The x900 Layer 3+ switches run the advanced AlliedWare Plus™ Layer 3 Fully Featured Operating System delivering a rich feature set and an industry-standard CLI.

Using VCStack allows stacked devices to appear as a single node on the network, greatly simplifying your management.

Administrators can choose from a range of secure remote management options including SNMPv3 and SSH.

Triggers automatically run user-defined scripts when specified events occur.

Loop Protection detects and warns you if a network loop occurs. You can also specify remedial action, such as shutting down the affected ports.

## Secure

**Advanced security features protect your network - from the edge to the core.**

### 802.1x User Authentication

The x900 Layer 3+ switches have 802.1x user authentication. This is essential for Enterprise networks needing to prevent intruders from accessing their network. Other security features include Private VLANs.

### Network Access Control (NAC)

NAC allows for unprecedented control over user access to the network, in order to mitigate threats to network infrastructure. The x900 Layer 3+ switches support NAC by using 802.1x port-based authentication in partnership with standards-compliant dynamic VLAN assignment to enable a user's adherence to the network's security policies to be assessed and authentication either granted or remediation offered.

Allied Telesis NAC also supports alternatives to 802.1x port-based authentication, such as web authentication to enable guest access, and MAC authentication for end points that do not have an 802.1x supplicant. Furthermore, if multiple users share a port then multi-authentication can be used and a Guest VLAN (also known as Default VLAN) can be configured to provide a catch-all for users without an 802.1x supplicant. As well as supporting a RADIUS client for remote authentication, the x900 Layer 3+ switches have a built-in RADIUS server for local authentication.

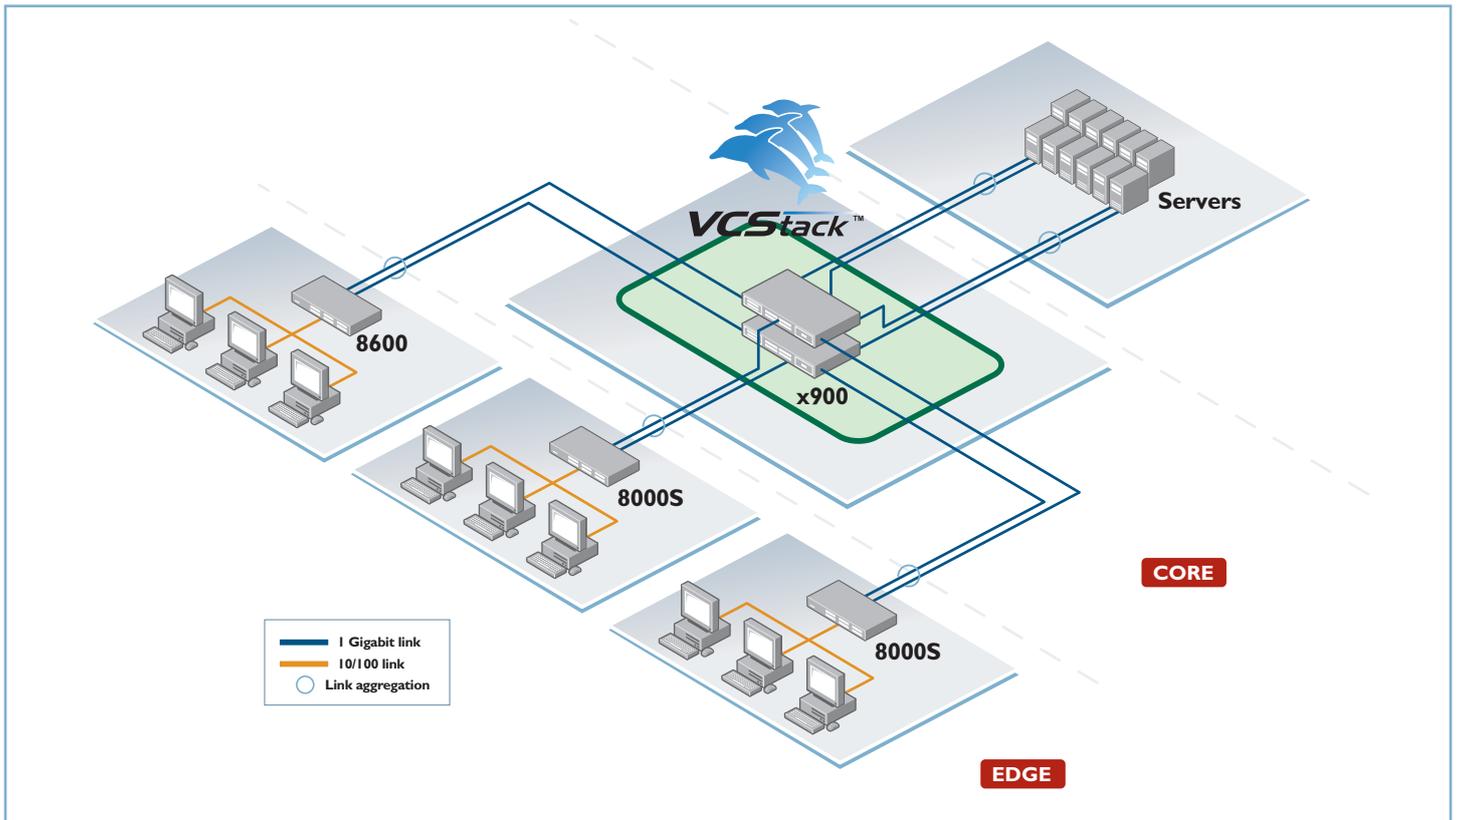


Diagram I: Resilient Core

## Virtual Chassis Stacking (VCStack) - Resiliency and Stability

Today's enterprises rely on Information Technology resources and applications to access business-critical information, and for day-to-day work. A high-availability infrastructure is now of paramount importance, starting with a resilient network core. The Allied Telesis expandable x900 series switches provide the ideal solution - without the expense of a full chassis.

Using Virtual Chassis Stacking (VCStack) at the core of your network allows multiple switches to appear as a single virtual chassis. In normal operation, this virtual chassis acts as a single switch, simplifying management.

The above diagram shows link aggregation between the core VCStack and the edge switches. With link aggregation across ports on different virtual chassis members, there is no perceptible disruption in the case of a link failure, and the full bandwidth of the network is available.

VCStack and link aggregation provide a solution where network resources are spread across the virtual chassis members, ensuring device and path resiliency. Virtualization of the network core ensures access to information when you need it.

With the benefits of high availability, increased capacity and ease of management, VCStack makes networking reliable and simple.



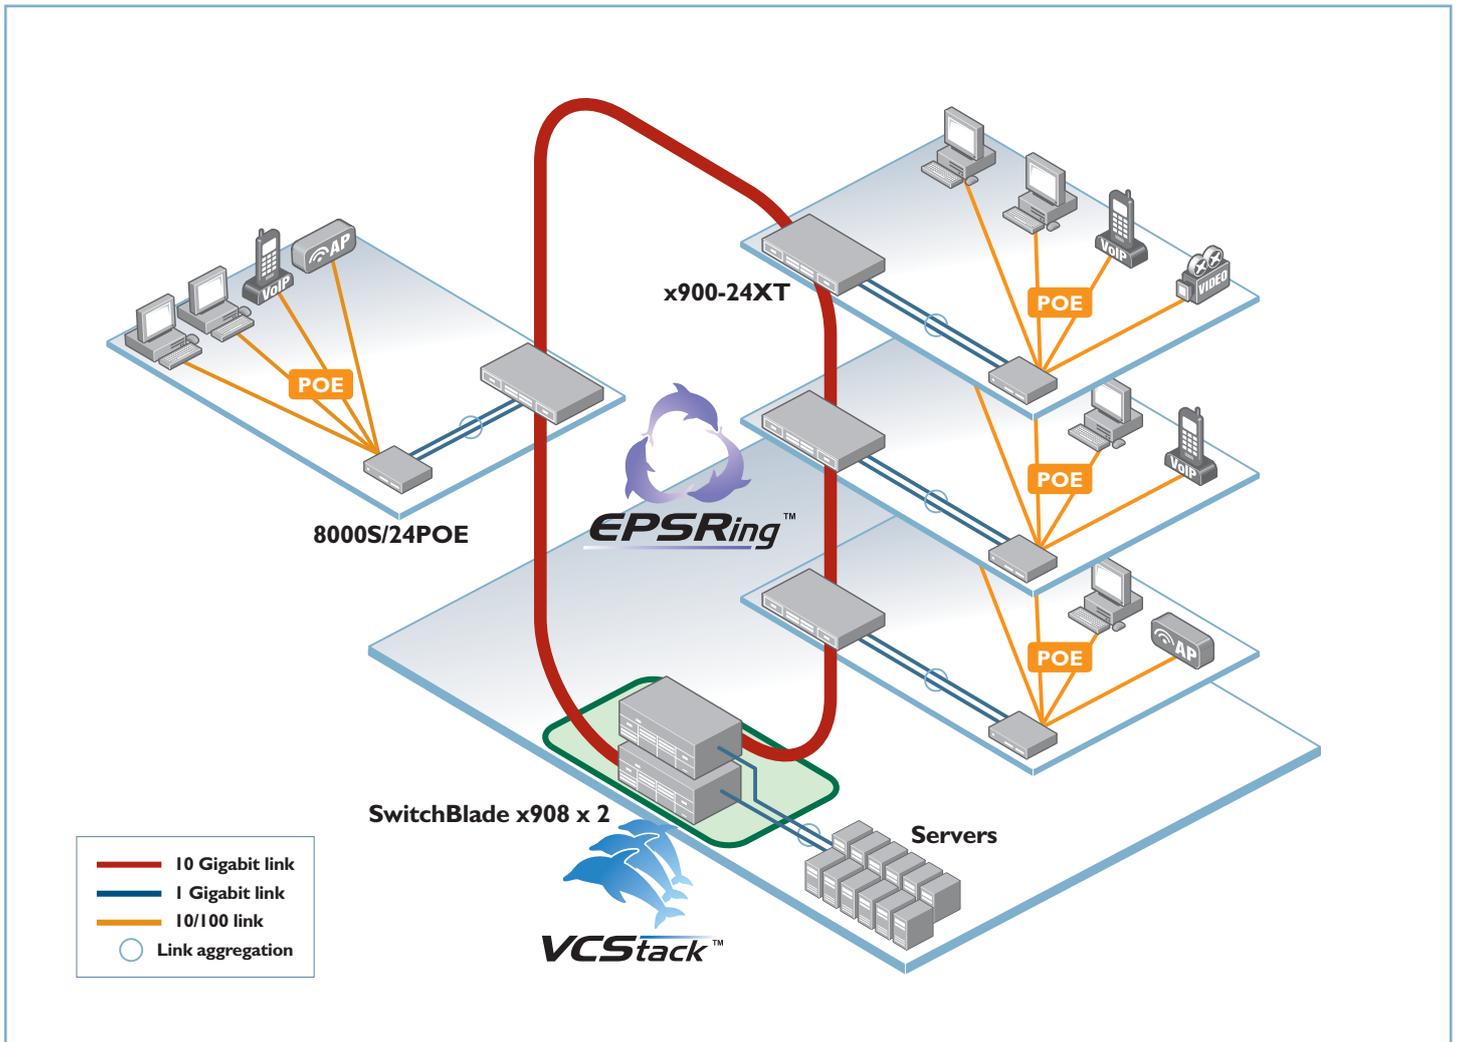


Diagram 2: Corporate EPSR network

### Ethernet Protection Switching Ring (EPSR) - Resiliency and Fault Tolerance

The increased convergence of services and applications in the enterprise has led to increasing demand for highly available networks with minimal downtime. High bandwidth is also required for the multiple applications simultaneously using the network. Real-time applications like surveillance, video streaming and voice over IP (VoIP) are used right alongside data and Internet access.

When you want a high-performing, resilient network for your enterprise core, using EPSR with the Allied Telesis SwitchBlade x908 and x900 series switches provides the ideal solution. EPSR creates a high-speed resilient ring that can utilize today's maximum Ethernet standard of 10Gbps, and provide extremely fast failover between nodes. EPSR enables rings to recover within as little as 50ms, preventing a node or link failure from affecting customer experience, even with demanding applications such as IP telephony and video monitoring.

The above diagram shows a corporate network based on a central EPSR ring. The inclusion of Allied Telesis Virtual Chassis Stacking (VCStack) technology at the core of the network adds a further layer of resiliency, increasing the availability of critical resources.

Now that technology has made high-availability and high-bandwidth so accessible; corporate business, education providers and other enterprise network users can enjoy the benefits that EPSR has to offer. By ensuring always-available online applications and resources, this advanced self-healing network technology meets the insatiable demand for information at the fingertips.



# x900-12X AND 24X SERIES | Advanced Gigabit Layer 3+ Expandable Switches

## The x900 12X and 24X Series:

### x900-24XT

2 x 60Gbps expansion bays  
24 x 10/100/1000BASE-T (RJ-45) copper ports

### x900-24XT-N

NEBS Compliant<sup>1</sup>  
2 x 60Gbps expansion bays  
24 x 10/100/1000BASE-T (RJ-45) copper ports

### x900-24XS

2 x 60Gbps expansion bays  
24 x 100/1000BASE-X SFP ports

### x900-12XT/S

1 x 60Gbps expansion bay  
12 x combo ports (10/100/1000BASE-T copper or SFP)

## Performance

- Forwarding Rate:
  - x900-24X 71.4Mpps<sup>2</sup>
  - x900-12XT/S 35.7Mpps<sup>3</sup>
- Extensive wire-speed traffic classification for ACLs and QoS
- Supports 10KB Jumbo frame size for data center and server aggregation applications
- Wire-speed multicasting
- Switching Fabric
  - x900-24X 168Gbps
  - x900-12XT/S 84Gbps
- Up to 256K IPv4 routes
- Up to 16K MAC addresses
- Up to 4K layer 2 multicast groups
- 4K layer 3 interfaces
- Up to 1K layer 3 IPv4 multicast groups
- 4K VLANs
- 512MB DDR SDRAM
- Separate packet buffer memory
- 64MB Flash Memory

## Reliability

- MTBF
  - x900-24X**  
With 1 PSU and 1 fan module: 93,700 hours  
With 2 PSUs: 249,400 hours  
(calculated using Telcordia SR-332 (Issue 1, May 2001) at 25°C ambient operating temperature)
  - x900-12XT/S**  
MTBF 103,000 hours

- Modular AlliedWare Plus operating system
- The x900-24X switches feature dual hot-swappable PSUs with 1 + 1 redundancy
- Dual feed support - a separate power circuit can feed each power supply providing extra reliability
- Hot-swappable XEMs
- Full environmental monitoring of PSUs, fans, temperature and internal voltages, with SNMP traps to alert network managers in case of any failure

## Power Characteristics

- AC Voltage: 100 to 240V (+/-10% auto ranging)
- Frequency: 47 to 63Hz
- DC Voltage: : 40 to 60V

## Power Consumption

- x900-24X**  
With 1 PSU and 1 fan module:  
110 Watts (375 BTU/hr)  
With 2 PSUs and 2 XEM-1XP modules:  
191 Watts (652 BTU/hr)
- x900-12XT/S**  
With 1 XEM-12: 104 Watts (355 BTU/hr)  
With no XEM: 68 Watts (232 BTU/hr)

## Environmental Specifications

- Operating Temperature Range: 0°C to 40°C (32°F to 104°F) Derated by 1°C per 305 Meters (1000ft)
- Storage Temperature Range: -30°C to 70°C (-13°F to 158°F)
- Operating Relative Humidity Range: 5% to 80% non-condensing
- Storage Relative Humidity Range: 5% to 95% non-condensing
- Altitude:  
3,050 Meters maximum (10,000ft)

## Expandability

- 2 high speed 60Gbps expansion bays
- IPv6 routing option

## Flexibility and compatibility

- 60Gbps expansion bays supporting a choice of modules, including 1x 10GbE, 12 x 1GbE (SFP), and 12 x 1GbE (RJ45) for port flexibility and application versatility
- XEM modules also compatible with the SwitchBlade x908 Advanced Layer 3 modular switch
- Gigabit SFP ports will support any combination of 10/100/1000BASE-T, 100BASE-X, or 1000BASE-X SFPs 100BASE-FX, 100BASE-BX, 1000BASE-SX, 1000BASE-LX, 1000BASE-ZX or 1000BASE-ZX CWDM SFPs

## Resiliency

- STP, RSTP, MSTP (802.1s)
- Link Aggregation (802.3ad LACP)
- VRRP
- EPSR
- Stack two units with the XEM-STK

## VLAN support

- Supports 4096 VLANs
- VLAN Double Tagging

## Security

- Private VLANs, providing security and port isolation of multiple customers using the same VLAN
- Dynamic VLAN assignment
- NAC
- 802.1x support

## Quality of Service

- Policy based QoS features
- Highly configurable traffic classification
- Extensive remarking capabilities, to fit in with any network's QoS scheme
- Control plane traffic prioritization
- Mixed scheduling, to support complex traffic queuing requirements
- 8 QoS queues per port
- Two-rate three-color (green, yellow, red) bandwidth metering, with burst sizes for improved TCP-IP bandwidth limiting performance and bandwidth resolution down to 1Kbps
- Low switching latency essential for Voice over IP (VoIP) and real-time streaming media applications

## Management

- Out of band 10/100/1000 Ethernet management port and console management port, both on the front panel for ease of access
- An SD memory card socket on the front panel, allowing software release files, configurations and other files to be stored for backup and distribution to other switches
- Port mirroring
- SSH and SNMPv3 for secure management
- RADIUS Authentication
- RMON (4 groups)

<sup>1</sup> NEBS (Network Equipment Building System) is a series of safety and conformance standards applied to telecommunications equipment in North America.

<sup>2</sup> With two 12x1GbE expansion modules (SFP or RJ45) installed

<sup>3</sup> With one 12x1GbE expansion module (SFP or RJ45) installed

# x900-12X AND 24X SERIES | Advanced Gigabit Layer 3+ Expandable Switches

## Physical Dimensions

Model	Height	Width	Depth	Mounting
x900-24X	44.5mm	440mm	440mm	1RU
x900-12XT/S	44.5mm	440mm	350mm	1RU
XEM	45mm	109mm	253mm	n/a
PSU	40mm	84mm	299mm	n/a

## Weights

Product	Configuration	Weight
x900-24X	With 1 PSU and 1 fan module, unpackaged	7.3 kg
	With 1 PSU and 1 fan module, packaged	8.8 kg
	With 2 PSUs and 2 XEM-1XP modules, unpackaged	9.3 kg
	With 2 PSUs and 2 XEM-1XP modules, packaged	10.8 kg
x900-12XT/S	No XEM, unpackaged	5.3 kg
	No XEM, packaged	7.9 kg
	With XEM-1XP, unpackaged	6 kg
	With XEM-1XP, packaged	8.6 kg
AT-PWR01	AC, unpackaged	1 kg
	AC, packaged	1.8 kg
	DC, unpackaged	1 kg
	DC, packaged	1.5 kg
AT-FAN01	Unpackaged	0.6 kg
	Packaged	1.4 kg
XEM	Unpackaged	0.82 kg
	Packaged	1.4 kg
PSU	Unpackaged	1.32 kg
	Packaged with 1 cable	1.9 kg

## Electrical Approvals and Compliances

EMC: EN55022 class A, FCC class A, VCCI class A

Immunity: EN55024, EN61000-3-levels 2 (Harmonics), and 3 (Flicker) - AC models only

NEBS: GR63, GR1089 level 3. x900-24XT-N and XEM-12S

## Safety

Standards: UL60950-1, CAN/CSA-C22.2 No. 60950-1-03, EN60950-1, EN60825-1, AS/NZS 60950.1

Certification: UL, cUL, TUV

## Restrictions on Hazardous Substances (RoHS) Compliance

EU RoHS Compliant

## Country of Origin

Singapore

## Standards and Protocols

AlliedWare Plus™ Operating System Version 5.3.1

### Authentication

- RFC 1321 MD5 Message-Digest Algorithm
- RFC 1828 IP Authentication using Keyed MD5

### Border Gateway Protocol (BGP)

- BGP Dynamic Capability
- BGP Graceful Restart
- BGP Outbound Route Filtering
- Extended Communities Attribute
- RFC 1771 Border Gateway Protocol 4 (BGP-4)
- RFC 1772 Application of the Border Gateway Protocol in the Internet
- RFC 1997 BGP Communities Attribute
- RFC 2385 Protection of BGP Sessions via the TCP MD5 Signature Option
- RFC 2439 BGP Route Flap Damping
- RFC 2796 BGP Route Reflection - An Alternative to Full Mesh IBGP
- RFC 2858 Multiprotocol Extensions for BGP-4
- RFC 2918 Route Refresh Capability for BGP-4
- RFC 3065 Autonomous System Confederations for BGP
- RFC 3107 Carrying Label Information in BGP-4
- RFC 3392 Capabilities Advertisement with BGP-4

### Diagnostic Tools

- BIST (Built-In Self Test)
- Ping Polling
- Trace Route

### Encryption

- FIPS 180-1 Secure Hash Standard (SHA-1)
- FIPS 186 Digital Signature Standard (RSA)
- FIPS 46-3 Data Encryption Standard (DES & 3DES)

### Ethernet

- IEEE 802.2 Logical Link Control
- IEEE 802.3 Ethernet CSMA/CD
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3ad Link Aggregation (static & LACP-based dynamic)
- IEEE 802.3ae 10 Gigabit Ethernet
- IEEE 802.3u 100BASE-T
- IEEE 802.3x Flow Control - Full Duplex Operation
- IEEE 802.3z Gigabit Ethernet

### General Routing

- Broadcast Forwarding
- ECMP Equal Cost Multi Path routing
- UDP Broadcast helper
- RFC 768 User Datagram Protocol (UDP)
- RFC 791 Internet Protocol (IP)
- RFC 792 Internet Control Message Protocol (ICMP)
- RFC 793 Transmission Control Protocol (TCP)
- RFC 826 Address Resolution Protocol (ARP)
- RFC 894 Standard for the transmission of IP datagrams over Ethernet networks
- RFC 903 Reverse ARP

- RFC 919 Broadcasting Internet Datagrams
- RFC 922 Broadcasting Internet Datagrams in the presence of subnets
- RFC 925 Multi-LAN ARP
- RFC 932 Subnetwork addressing scheme
- RFC 950 Internet Standard Subnetting Procedure
- RFC 951 Bootstrap Protocol (BootP) relay and server
- RFC 1027 Proxy ARP
- RFC 1035 DNS Client
- RFC 1042 Standard for the transmission of IP datagrams over IEEE 802 networks
- RFC 1071 Computing the Internet checksum
- RFC 1122 Internet Host Requirements
- RFC 1191 Path MTU discovery
- RFC 1256 ICMP Router Discovery Messages
- RFC 1518 An Architecture for IP Address Allocation with CIDR
- RFC 1519 Classless Inter-Domain Routing (CIDR)
- RFC 1542 Clarifications & Extensions for the Bootstrap Protocol
- RFC 1700 Assigned Numbers
- RFC 1812 Requirements for IPv4 Routers
- RFC 1918 IP Addressing
- RFC 2131 DHCP for IPv4
- RFC 2132 DHCP Options and BOOTP Vendor Extensions
- RFC 2581 TCP Congestion Control
- RFC 3046 DHCP Relay Agent Information Option (DHCP Option 82)
- RFC 3232 Assigned Numbers
- RFC 3993 Subscriber-ID Suboption for DHCP Relay Agent Option

### IPv6 Features

- 6to4 Tunnelling
- IPv4 and IPv6 Dual Stack
- IPv6 Management via Ping, TraceRoute, Telnet and SSH
- Static Unicast Routes for IPv6
- RFC 1886 DNS Extensions to support IPv6
- RFC 1887 An Architecture for IPv6 Unicast Address Allocation
- RFC 1981 Path MTU Discovery for IPv6
- RFC 2460 IPv6 specification
- RFC 2461 Neighbour Discovery for IPv6
- RFC 2462 IPv6 Stateless Address Autoconfiguration
- RFC 2463 ICMPv6
- RFC 2464 Transmission of IPv6 Packets over Ethernet Networks
- RFC 2526 Reserved IPv6 Subnet Anycast Addresses
- RFC 2553 Basic Socket Interface Extensions for IPv6
- RFC 2711 IPv6 Router Alert Option
- RFC 2851 Textual Conversions for Internet Work Addresses
- RFC 2893 Transition Mechanisms for IPv6 Hosts and Routers
- RFC 3056 Connection of IPv6 Domains via IPv4 Clouds
- RFC 3484 Default Address Selection for IPv6
- RFC 3513 IPv6 Addressing Architecture
- RFC 3587 IPv6 Global Unicast Address Format
- RFC 4443 Internet Control Message Protocol (ICMPv6)

### Management

- AT Enterprise MIB
- Control Plane Prioritisation
- SNMP Traps
- RFC 1155 Structure and Identification of Management Information for TCP/IP-based Internets
- RFC 1157 Simple Network Management Protocol (SNMP)
- RFC 1212 Concise MIB definitions
- RFC 1213 MIB for Network Management of TCP/IP-based internets: MIB-II
- RFC 1215 Convention for defining traps for use with the SNMP
- RFC 1227 SNMP MUX protocol and MIB
- RFC 1239 Standard MIB
- RFC 1493 Bridge MIB
- RFC 2011 SNMPv2 MIB for IP using SMIv2
- RFC 2012 SNMPv2 MIB for TCP using SMIv2
- RFC 2013 SNMPv2 MIB for UDP using SMIv2
- RFC 2096 IP Forwarding Table MIB
- RFC 2574 User-based Security Model (USM) for SNMPv3
- RFC 2575 View-based Access Control Model (VACM) for SNMP
- RFC 2674 Definitions of Managed Objects for Bridges with Traffic Classes, Multicast Filtering and Virtual LAN Extensions (VLAN)
- RFC 2741 Agent Extensibility (AgentX) Protocol
- RFC 2790 Host MIB
- RFC 2819 RMON MIB
- RFC 2863 Interfaces Group MIB
- RFC 3164 Syslog Protocol
- RFC 3412 Message Processing and Dispatching for the SNMP
- RFC 3413 SNMP Applications
- RFC 3418 MIB for SNMP
- RFC 3635 Definitions of Managed Objects for the Ethernet-like Interface Types
- RFC 3636 IEEE 802.3 MAU MIB
- RFC 4188 Definitions of Managed Objects for Bridges
- RFC 4318 Definitions of Managed Objects for Bridges with RSTP
- RFC 4560 Definitions of Managed Objects for Remote Ping, TraceRoute, and Lookup operations

### Multicast Support

- Bootstrap Router for PIM-SM
- IGMP Proxy
- IGMP Snooping
- MLD Snooping (v1 and v2)
- RFC 1112 Host extensions for IP multicasting
- RFC 2236 Internet Group Management Protocol v2 (IGMPv2)
- RFC 2362 PIM-SM
- RFC 2715 Interoperability Rules for Multicast Routing Protocols
- RFC 3376 IGMPv3
- RFC 3973 PIM-DM
- RFC 4541 IGMP & MLD snooping switches

## Open Shortest Path First (OSPF)

Graceful OSPF Restart  
OSPF Link-local Signaling  
OSPF MD5 Authentication  
OSPF Restart Signaling  
OSPF TE Extensions  
Out-of-band LSDB Resync  
RFC 1245 OSPF protocol analysis  
RFC 1246 Experience with the OSPF protocol  
RFC 1370 Applicability Statement for OSPF  
RFC 1765 OSPF Database Overflow  
RFC 2328 OSPFv2  
RFC 2370 OSPF Opaque LSA Option  
RFC 3101 OSPF Not-So-Stubby Area (NSSA) Option  
RFC 3509 Alternative Implementations of OSPF Area Border Routers

## Quality of Service

ACLs Access Control Lists  
IEEE 802.1p Priority Tagging  
RFC 2211 Specification of the Controlled-Load Network Element Service  
RFC 2474 DiffServ Precedence for 8 queues/port  
RFC 2475 DiffServ Architecture  
RFC 2597 DiffServ Assured Forwarding (AF)  
RFC 2697 A Single-Rate Three-Color Marker  
RFC 2698 A Two-Rate Three-Color Marker  
RFC 3246 DiffServ Expedited Forwarding (EF)

## Resiliency Features

Dynamic Link Failover  
Ethernet Protection Switched Rings (EPSR)  
Loop Protection - Loop Detection  
Loop Protection - Thrash Limiting  
STP Root Guard  
IEEE 802.1D Spanning Tree Protocol (STP) - MAC Bridges  
IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)  
IEEE 802.1t - 2001 802.1D maintenance  
IEEE 802.1w - 2001 Rapid Spanning Tree Protocol (RSTP)  
RFC 3768 Virtual Router Redundancy Protocol (VRRP)

## Routing Protocols

Route Maps  
Route Redistribution (OSPF, BGP, RIP)  
RFC 1058 Routing Information Protocol (RIP)  
RFC 2080 RIPng for IPv6  
RFC 2081 RIPng Protocol Applicability Statement  
RFC 2082 RIP-2 MD5 Authentication  
RFC 2453 RIPv2

## Security Features

BPDU Protection  
Dynamic VLAN Assignment  
Guest VLAN support (IEEE 802.1x)  
IEEE 802.1x Port Based Network Access Control  
IEEE 802.1x Authentication protocols (TLS, TTLS, PEAP & MD5)  
IEEE 802.1x Multi Supplicant authentication  
MAC-based authentication  
Port Security  
SSH Remote Login  
SSLv2  
SSLv3  
Web-based Authentication  
RFC 2246 TLS Protocol v1.0  
RFC 2865 RADIUS  
RFC 2866 RADIUS Accounting  
RFC 2868 RADIUS Attributes for Tunnel Protocol Support  
RFC 3546 Transport Layer Security (TLS) Extensions  
RFC 3748 PPP Extensible Authentication Protocol (EAP)  
RFC 4251 Secure Shell (SSHv2) Protocol Architecture  
RFC 4252 Secure Shell (SSHv2) Authentication Protocol  
RFC 4253 Secure Shell (SSHv2) Transport Layer Protocol  
RFC 4254 Secure Shell (SSHv2) Connection Protocol

## Services

SCP Secure Copy  
RFC 854 Telnet protocol specification  
RFC 855 Telnet Option Specifications  
RFC 857 Telnet Echo Option  
RFC 858 Telnet Suppress Go Ahead Option  
RFC 1091 Telnet terminal-type option  
RFC 1305 NTPv3  
RFC 1350 Trivial File Transfer Protocol (TFTP)  
RFC 1985 SMTP Service Extension  
RFC 2049 MIME  
RFC 2554 SMTP Service Extension for Authentication  
RFC 2616 Hypertext Transfer Protocol - HTTP/1.1  
RFC 2821 Simple Mail Transfer Protocol (SMTP)  
RFC 2822 Internet Message Format

## User Interface Features

Event-based Triggers  
Graphical User Interface (GUI)  
Industry-standard CLI with built-in Help  
Powerful CLI scripting tool

## VLAN Support

Private VLANs  
IEEE 802.1ad VLAN double tagging (Q-in-Q)  
IEEE 802.1Q Virtual LANs  
IEEE 802.1v VLAN classification by protocol & port  
IEEE 802.3ac VLAN tagging

# x900-12X AND 24X SERIES | Advanced Gigabit Layer 3+ Expandable Switches

## Ordering Information

Product	Description
AT-x900-24XT	Advanced Gigabit Layer 3+ Expandable Switch 2 x High Speed Expansion Bays + 24 x 10/100/1000BASE-T (RJ-45) ports
AT-x900-24XT-N	NEBS Compliant Advanced Gigabit Layer 3+ Expandable Switch 2 x High Speed Expansion Bays + 24 x 10/100/1000BASE-T (RJ-45) ports
AT-x900-24XS	Advanced Gigabit Layer 3+ Expandable Switch 2 x High Speed Expansion Bays + 24 x 100/1000BASE-X SFP ports
AT-x900-12XT/S	Advanced Gigabit Layer 3+ Expandable Switch 1 x High Speed Expansion Bay + 12 x combo ports (10/100/1000BASE-T copper or SFP) 1 fixed AC PSU
AT-PVWR01	Hot-swappable load-sharing power supply
AT-FAN01	Fan only module
AT-XEM-1XP	1 x 10GbE (XFP)
AT-XEM-12S	NEBS compliant 12 x 100/1000BASE-X SFP ports
AT-XEM-12T	12 x 10/100/1000BASE-T (RJ-45) ports
AT-XEM-STK <sup>4</sup>	2 x stacking ports
AT-XEM-STK-CBL0.5	Half meter stacking cable
AT-XEM-STK-CBL2.0	Two meter stacking cable

### Key

Where xx = 00 or 60 for all power cords  
20 for no power cord  
80 for 48V DC power supply

Where zz = 10 for U.S. power cord  
20 for no power cord  
30 for U.K. power cord  
40 for Asia/Pacific power cord  
50 for European power cord  
80 for 48V DC power supply

<sup>4</sup> The XEM-STK ships with no stacking cables.

# x900-12X AND 24X SERIES | Advanced Gigabit Layer 3+ Expandable Switches

## SFP Modules

Module	Description
AT-SPFX/2	100BASE-FX 1310nm fiber up to 2km
AT-SPFX/15	100BASE-FX 1310nm fiber up to 15km
AT-SPFX/40	100BASE-FX 1310nm fiber up to 40km
AT-SPFXBD-LC-13	100BASE-BX Bi-Di (1310nm Tx, 1550 Rx) fiber up to 15km
AT-SPFXBD-LC-15	100BASE-BX Bi-Di (1550nm Tx, 1310 Rx) fiber up to 15km
AT-SPTX <sup>5</sup>	10/100/1000BASE-T 100m Copper
AT-SPSX	1000BASE-SX GbE multi-mode 850nm fiber
AT-SPLX10	1000BASE-LX GbE single-mode 1310nm fiber up to 10km
AT-SPLX40	1000BASE-LX GbE single-mode 1310nm fiber up to 40km
AT-SPLX40/1550	1000BASE-LX GbE single-mode 1550nm fiber up to 40km
AT-SPZX80	1000BASE-ZX GbE single-mode 1550nm fiber up to 80km

## 10GbE XFP Modules

For use with XEM-IXP

Module	Description	Specifics
AT-XPSR	10GBASE-SR	850nm Short-haul, 300m with MMF
AT-XPLR	10GBASE-LR	1310nm Medium-haul, 10km with SMF
AT-XPER40	10GBASE-ER	1550nm Long-haul, 40km with SMF

## Feature licenses

Name	Description	Includes
AT-FL-X900-01	x900 Advanced Layer 3 license	<ul style="list-style-type: none"> <li>• OSPF</li> <li>• BGP4</li> <li>• PIMv4</li> <li>• VLAN double tagging (Q in Q)</li> </ul>
AT-FL-X900-02	x900 IPv6 Pack	<ul style="list-style-type: none"> <li>• IPv6 Static Routes</li> <li>• IPv6 Management</li> <li>• RIPng</li> <li>• MLD Snooping</li> </ul>

<sup>5</sup> The AT-SPTX is not supported on the x900-12XT/S.

## About Allied Telesis

Allied Telesis is part of the Allied Telesis Group. Founded in 1987, the company is a global provider of secure Ethernet/IP access solutions and an industry leader in the deployment of IP Triple Play networks over copper and fiber access infrastructure. Our POTS-to-10G iMAP integrated Multiservice Access Platform and iMG intelligent Multiservice Gateways, in conjunction with advanced switching, routing and WDM-based transport solutions, enable public and private network operators and service providers of all sizes to deploy scalable, carrier-grade networks for the cost-effective delivery of packet-based voice, video and data services.

Visit us online at [www.alliedtelesis.com](http://www.alliedtelesis.com).

## Service and Support

Allied Telesis provides value-added support services for its customers under its Net.Cover programs. For more information on Net.Cover support programs available in your area, contact your Allied Telesis sales representative or visit our website.

## RoHS

Allied Telesis RoHS-compliant product conforms to the European Union Restriction of the Use of Certain Hazardous Substances (RoHS) in Electrical and Electronic equipment. Allied Telesis ensures RoHS conformance by requiring supplier Declarations of Conformity, monitoring incoming materials, and maintaining manufacturing process controls.

USA Headquarters | 19800 North Creek Parkway | Suite 100 | Bothell | WA 98011 | USA | T: +1 800 424 4284 | F: +1 425 481 3895  
 European Headquarters | Via Motta 24 | 6830 Chiasso | Switzerland | T: +41 91 69769.00 | F: +41 91 69769.11  
 Asia-Pacific Headquarters | 11 Tai Seng Link | Singapore | 534182 | T: +65 6383 3832 | F: +65 6383 3830

[www.alliedtelesis.com](http://www.alliedtelesis.com)

© 2008 Allied Telesis Inc. All rights reserved. Information in this document is subject to change without notice. All company names, logos, and product designs that are trademarks or registered trademarks are the property of their respective owners. 617-000169 Rev H